

# MOISTURE RESISTANT WALL/CEILING MOUNT

**INDUSTRIAL**

## PRODUCT HIGHLIGHTS

### FEATURES:


- High velocity air movement
- Constructed with high-grade steel
- Factory balanced aluminium blades
- Fan head tilt able to 105°
- Powder coated guard, blade, base and pole for corrosion resistance
- 3 speed with pull chain
- Attached adjustable wall mount bracket pivots up to 140°
- Adjustable ceiling or wall mount bracket attached
- 1 year warranty

### APPLICATIONS:

- Greenhouse
- Patios (with GFI Cord)
- Moisture applications
- Industrial



**OSHA Compliant**

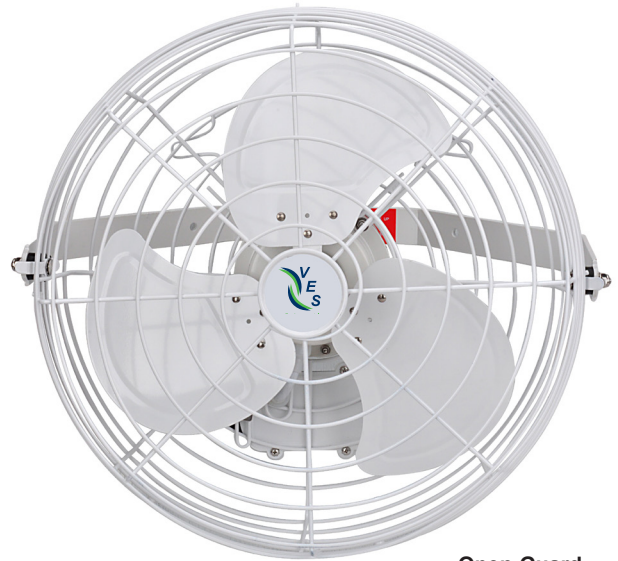

**Open Guard**

Our Moisture Resistant Basket Fan series of OSHA compliant and optional Open Style Guard gives you great performance, energy efficiency and an air pattern that is designed for heat de-stratification. The OSHA compliant guard means the fan can be mounted at any height. The totally enclosed air over motor can be used in harsh horticultural and industrial environments.

### ADDITIONAL FEATURES:

- Wall and ceiling mount available in 18".
- High velocity air movement
- Constructed with high-grade steel
- Factory balanced aluminium blades
- UL507 with GFI Cord available on special order only, tested and rated for use with misting and fogging rings for indoor and outdoor use
- Fan head tilt able to 105°
- Guard, blade, and bracket powder coated for corrosion resistance
- 3 speed with pull chain.
- Motor is CSA/CSA-US approved
- Direct drive motor is completely sealed with permanently lubricated ball bearings with thermal overload protection
- Adjustable wall mount bracket pivots up to 140°
- 1 year warranty



Environmental Solutions, LLC.

[vesenviro.com](http://vesenviro.com)

8296 Commerce Pkwy,  
Chippewa Falls, WI 54729 USA  
Toll Free Tel.: (888) 622-2999  
Tel.: (715) 720-0800  
[info@vesenviro.com](mailto:info@vesenviro.com)

### SPECIFICATIONS

Model	Size	Spd	HP	RPM		CFM @ .0 SP		CFM/Watt @ .0 SP		AMPS		Cord
				Hi/Med/Lo	HZ	Hi/Med/Lo	Hi/Med/Lo	Voltage	Hi/Med/Lo			
HVW-18M	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	12'		
HVW-18MB	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	12'		
HVW-18M-OG	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	12'		
HVW-18MB-OG	18"	3	1/10	1570/1400/1000	60	6357/5086/4068	38/34/31	120	1.45/1.35/1.27	12'		

OG = Open Guard (non-OSHA compliant)