

ROLLED RUBBER

AGRICULTURAL

PRODUCT HIGHLIGHTS


ROLLED RUBBER

FEATURES:

- Lengths up to 150' without a seam
- Widths 1' to 6.5'
- Thickness 5/8" to 3/4"
- Cost effective and easy installation
- Non-absorbent
- Designed specifically for dairy applications
- Bacteria resistant
- UV inhibitor to protect from sun exposure
- Available with hammer tone top to help eliminate cow slippage
- Rubber backing available in ribbed or flat back
- Available with or without Mesh Scrim
- 2 year warranty on approved installations



Hammer Tone

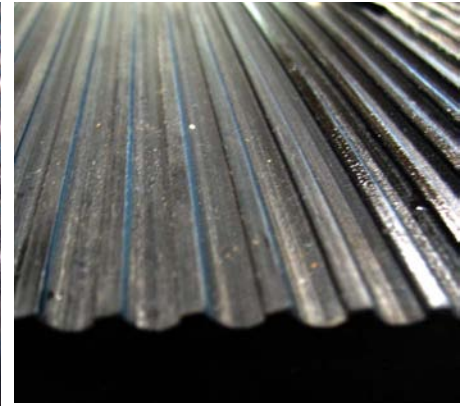

Grooved Bottom

Rubber for the North American Dairy Market

VES Environmental Solutions, LLC. top quality rolled rubber is perfect for today's modern dairy. Our automated factories in China produce a consistent compound that gives excellent tensile strength, hardness and abrasion resistance. Every production run goes through a rigorous testing procedure before shipping to fulfill our high quality standards. We are able to produce rubber in 5/8" and 3/4" thickness, 1' to 6.5' widths and up to 150' length rolls. We offer the ability to mix and match different styles of rubber on each container giving you flexibility along with ease of ordering. Today's modern dairies require top quality rubber to maximize cow comfort and health. Let VES help you add profit to your company with our container program.

Physical Spec.	VES Compound
Hardness (duro)	66
Tensile Strength(psi)	770
Elongation(%)	224%
Compression set (%)	8%
Specific Gravity (g/cm3)	1.24
Taber Abrasion (mm3)	142
Taber Abrasion (g)	0.18
After Hot Air Aging test 100 C x 22 Hours	
Hardness Change(duro)	4
Aging Co-efficient	0.98
Tensile Strength Change (5)	5%
Elongation Change (%)	-3%

Part#	Thickness	Back of Rubber	Wt. Per Square Ft	Scrim
RR63RB	5/8 INCH	Ribbed	3.76	No
RR63RBS	5/8 INCH	Ribbed	3.76	Yes
RR75RB	3/4 INCH	Ribbed	4.45	No
RR75RBS	3/4 INCH	Ribbed	4.45	Yes



Environmental Solutions, LLC.
vesenviro.com

8296 Commerce Pkwy,
 Chippewa Falls, WI 54729 USA
 Toll Free Tel.: (888) 622-2999
 Tel.: (715) 720-0800
info@vesenviro.com